


SK60

Ceramic tiles white, bordeaux or serpentine stone

STANDARD EQUIPMENT

- above flue ø 150 mm
- safety heat exhaust outfitted for connection to a close circuit
- pump thermostat
- primary air thermostatic regulation
- external flue air

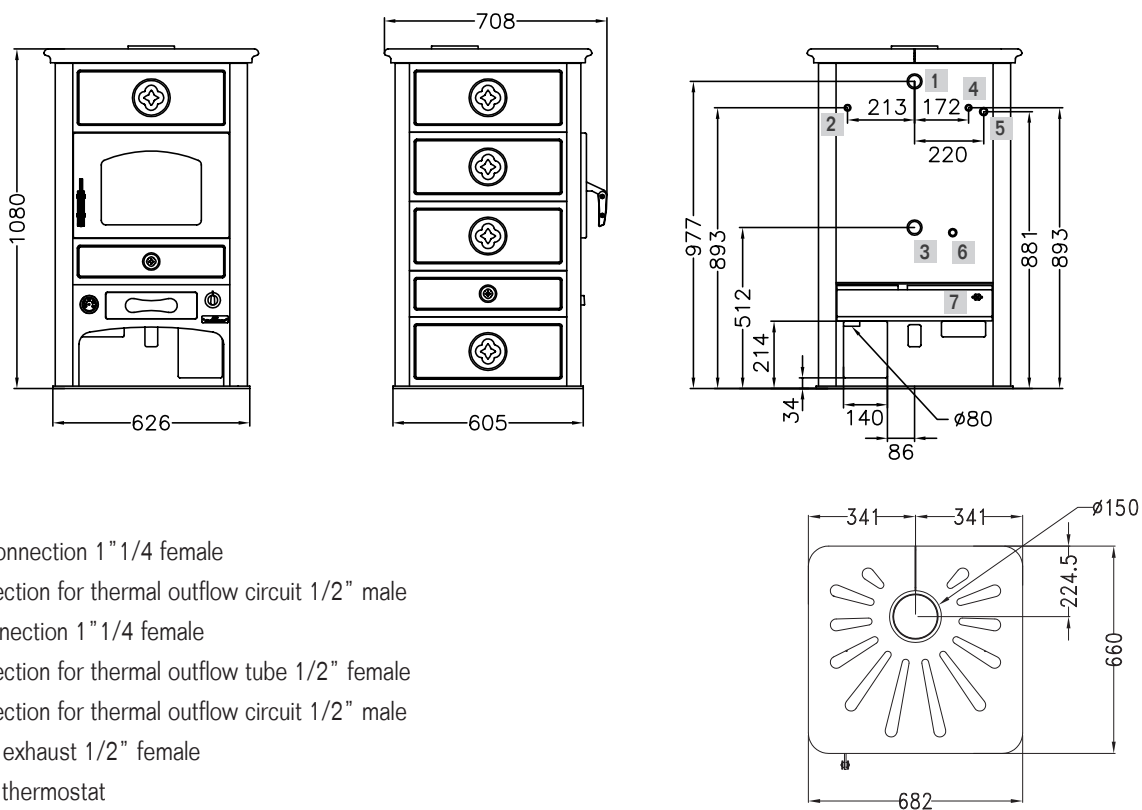

DATA SHEET

Nominal heat output (max): 13.9 (24.5) kW	Nominal water heat output (max): 12.5 (20.5) kW
Mean content of CO to 13% O ₂ : 0.06 %	Efficiency: 85.2 %
Maximum operating pressure: 2.5 bar	Boiler capacity: 26.5 Lt
Firebox capacity (LxPxH): 33x36x45 cm	Fill opening (LxH): 35x25 cm
Mean flue gas temperature: 200 °C	Flue gas mass flow: 12.9 g/s
Flue depression: mbar 0.12	Net weight/package included: kg 310/330